

# GROUND BARS

| Pattern "J" | | | | |
|---|---|---|---|---|
| **Catalog Number** | **Kit** | **Tinned** | **Bar Size** | **# of Holes** |
| CB14412J | Bar Only | No | 1/4" X 4" X 12" | 27 |
| TCB14412J | | Yes | 1/4" X 4" X 12" | 27 |
| CB14412JK | Bar w/ Insulators & Brackets | No | 1/4" X 4" X 12" | 27 |
| TCB14412JK | | Yes | 1/4" X 4" X 12" | 27 |
| CB14420J | Bar Only | No | 1/4" X 4" X 20" | 51 |
| TCB14420J | | Yes | 1/4" X 4" X 20" | 51 |
| CB14420JK | Bar w/ Insulators & Brackets | No | 1/4" X 4" X 20" | 51 |
| TCB14420JK | | Yes | 1/4" X 4" X 20" | 51 |
| CB14424J | Bar Only | No | 1/4" X 4" X 24" | 63 |
| TCB14424J | | Yes | 1/4" X 4" X 24" | 63 |
| CB14424JK | Bar w/ Insulators & Brackets | No | 1/4" X 4" X 24" | 63 |
| TCB14424JK | | Yes | 1/4" X 4" X 24" | 63 |

- Mounting holes not included in total.
- Accommodates two hole lugs spaced 3/4", 1" and 1-3/4" on center.
- 12" bar pictured. Holes are 7/16" diameter.
- Bars available electro-tin plated.
- Bars available with pigtails.
- Tamper proof bolts available.
- Plexiglas cover available.
- Other sizes available. Contact factory for details.

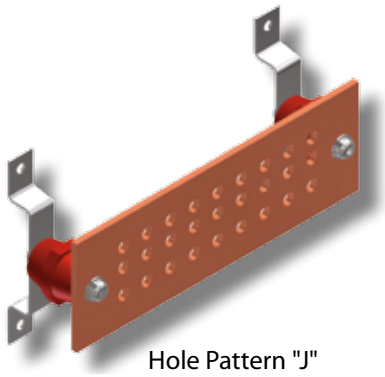


Hole Pattern "J"



Ground Bar shown with optional pigtail.

| Pattern "M" | | | | |
|---|---|---|---|---|
| **Catalog Number** | **Kit** | **Tinned** | **Bar Size** | **# of Holes** |
| CB14412M | Bar Only | No | 1/4" X 4" X 12" | 48 |
| TCB14412M | | Yes | 1/4" X 4" X 12" | 48 |
| CB14412MK | Bar w/ Insulators & Brackets | No | 1/4" X 4" X 12" | 48 |
| TCB14412MK | | Yes | 1/4" X 4" X 12" | 48 |
| CB14420M | Bar Only | No | 1/4" X 4" X 20" | 88 |
| TCB14420M | | Yes | 1/4" X 4" X 20" | 88 |
| CB14420MK | Bar w/ Insulators & Brackets | No | 1/4" X 4" X 20" | 88 |
| TCB14420MK | | Yes | 1/4" X 4" X 20" | 88 |
| CB14424M | Bar Only | No | 1/4" X 4" X 24" | 112 |
| TCB14424M | | Yes | 1/4" X 4" X 24" | 112 |
| CB14424MK | Bar w/ Insulators & Brackets | No | 1/4" X 4" X 24" | 112 |
| TCB14424MK | | Yes | 1/4" X 4" X 24" | 112 |


- Mounting holes not included in total.
- Accommodates two hole lugs spaced 3/4" and 1" on center.
- 12" bar pictured. Holes are 7/16" diameter and slots are 7/16" x 11/16".
- Bars available electro-tin plated.
- Tamper proof bolts available.
- Plexiglas cover available.
- Other sizes available. Contact factory for details.

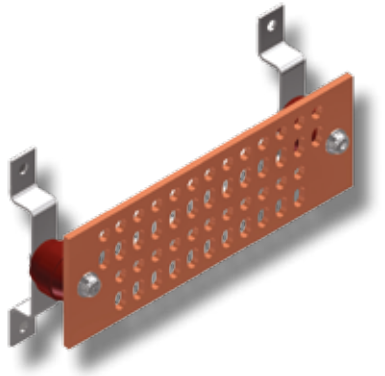

Hole Pattern "M"

| Pattern "P" | | | | |
|---|---|---|---|---|
| **Catalog Number** | **Kit** | **Tinned** | **Bar Size** | **# of Holes** |
| CB14212P | Bar Only | No | 1/4" X 2" X 12" | 26 |
| TCB14212P | | Yes | 1/4" X 2" X 12" | 26 |
| CB14212PK | Bar w/ Insulators & Brackets | No | 1/4" X 2" X 12" | 26 |
| TCB14212PK | | Yes | 1/4" X 2" X 12" | 26 |

- Mounting holes not included in total.
- Accommodates two hole lugs spaced 3/4" and 1" on center.
- 12" bar pictured. Holes are 7/16" diameter and slots are 7/16" x 11/16".
- Bars available electro-tin plated.
- Tamper proof bolts available.
- Plexiglas cover available.
- Other sizes available. Contact factory for details.

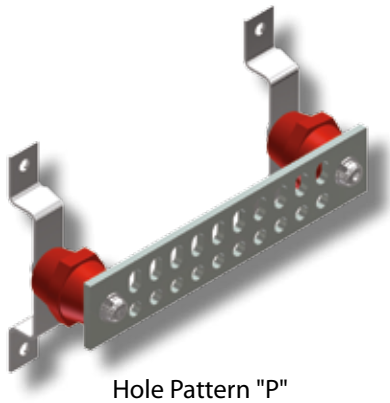

Hole Pattern "P"

c UL us
LISTED
Grounding Equipment
12 CM